Data Sheet : D Subminiature

Description: 3 to 50 position, VERY low cost, unsealed connectors for inline and panel mount applications. Stocked parts shown in table below, others available. Solder cup terminals.

CN-DSB-09-01 : 9 Position Housing Male	
CN-DSB-09-02 : 9 Position Housing Fem.	
CN-DSB-09-03 : 9 Position Backshell	
CN-DSB-15-01 : 15 Position Housing Male	
CN-DSB-15-02 : 15 Position Housing Fem.	
CN-DSB-15-03 : 15 Position Backshell	
CN-DSB-25-01 : 25 Position Housing Male	
CN-DSB-25-02 : 25 Position Housing Fem.	
CN-DSB-25-03 : 25 Position Backshell	
CN-DSB-50-01 : 50 Position Housing Male	
CN-DSB-50-02 : 50 Position Housing Fem.	
CN-DSB-50-03 : 50 Position Backshell	

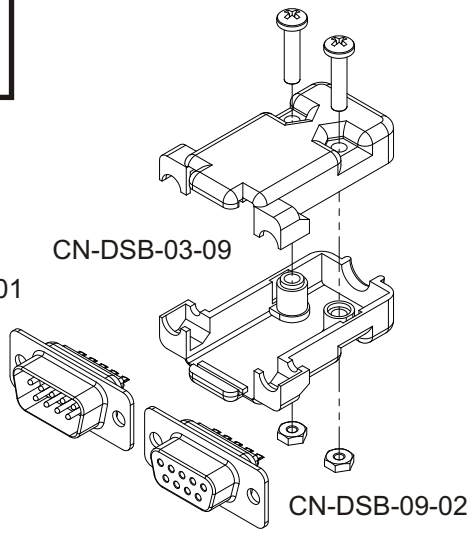

Mechanical:	Min.	Typ.	Max	Units	Comments
Material					
Terminals		Tin Plated Brass			
Housings		Thermoplastic			

Electrical:	Min.	Typ.	Max	Units	Comments
Wire Size	26		20	AWG	
Connector Positions	9		50	Positions	9 15, 25, 37, 50 Position Available
Operating Voltage			24	VDC	
Current Capacity			3	A	

Environmental:	Min.	Typ.	Max	Units	Comments
Operating Temperature	-40		125	Deg. C	
IP Rating		Unsealed		IP	

#10 953 Laval Cr. Kamloops BC V2C 5P4
800 Fifth Ave. #101-507 Seattle WA 98104
Ph. (877) 377-1117 Fax (877) 377-4036
www.controlgrips.com